

- Max. 60-station paging & communication system.
- Selective 4 talk channels with in-use LED's.
- Conference call among 3 stations.

- Music cutout during paging.
- Modular coil cord reinforced.



MC-60/4A
Market-Com
station



MC-60/4B
Market-Com
station, desk use



MC-A/A
Market-Com adaptor
for paging & intercom

Options



SP-3NA
3-watt speaker, ceiling





NBZ-M
Square frame
for SP-3NA



N-EA
Round frame
for SP-3NA


Communication network & wiring

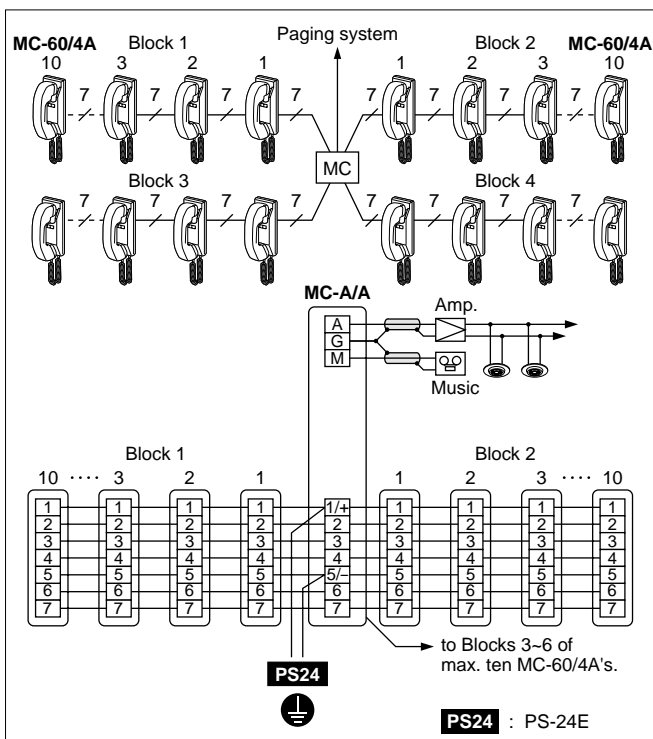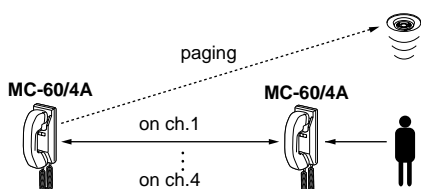


System Components

MC-60/4A: Market-Com station (max. 60 pcs)
MC-60/4B: Market-Com station, desk use w/terminal box
MC-A/A: Market-Com adaptor
Paging accessories
 PA amplifier w/100V line transformer.

MC-60/4A



MC-A/A



Specifications (MC-60/4A)

Power source	24V DC, 70mA max. (in page).	
Power supply	PS-24E at MC-A/A.	
Communication	Pick up and depress a channel selector 1~4 and page w/PAGE button. Called party picks up and depress an LED lit channel button.	
Talk channel	4 and a separate paging channel.	
Wiring	7 wires in loop, non-twisted.	
Cable specified	Line capacitance less than 25pF/30cm.	
Distance	0.65mmø	0.8mmø
• MC-A/A to MC-60/4A(*)	500m	750m
Total wiring distance	1,500m	
(*) MC-A/A to farthest MC-60/4A, or between two farthest MC-60/4A's of different blocks.		